

CONTRACT ADDENDUM NO. 1
To the Contract Provisions for
CITY OF MOUNT VERNON PROJECT#
TS-2020-002: 2020 STREET IMPROVEMENTS



DATE OF ISSUE: MARCH 27, 2020

No. of Pages Included in this Addendum: 4

NOTICE TO ALL PLANHOLDERS: This addendum must be inserted into your copy of the contract documents for the above named project.

The following changes, additions, and/or deletions are hereby made a part of the contract documents for the above named project and supersede all previous addenda or other information which may conflict with the information in this addendum.

Item No. 1: CHANGES TO BID OPENING DUE TO COVID-19 PANDEMIC

1. In accordance with the City's response to the COVID-19 pandemic, the bid opening procedure for this project has changed. The attached statement 'Coronavirus-Bid Process' which explains the new process is hereby made part of the Contract.
2. As a consequence of this change to the bid opening process, the deadline for submitting bids has been extended to Tuesday, April 14, 2020 at 2:00 PM. The bid opening will livestreamed at 3:00 PM.

Item No. 2: SUBCONTRACTOR DECLARATIONS

The Bidder shall include the attached form titled 'Subcontractor List' in the submitted bid.

Item No. 3: DEPTH OF PAVEMENT AND ROAD EX

With the exception of segment A01, wherever the plans indicate 'ROAD EX INCL. HAUL' the depth of excavation specified in the plans is an estimation of the depth of the existing asphalt pavement and 0.17 ft of existing crushed surfacing. It has been assumed that there is no concrete underlying any of the project where road ex has been specified. Segment A01 may include removal of native soil, clay, pit run, or other unknown materials currently undiscovered.

Item No. 4: STANDARD PLAN FOR ADJUSTMENT OF MANHOLE RING AND COVER

Standard Detail 3-4 for adjustment of manhole ring and cover is attached and made part of the contract.

Coronavirus – Bid Process

The city of Mount Vernon, WA is encouraging bidders on city contracts and services to submit bids by mail, Federal Express or UPS before bid deadlines instead of showing up in person.

Mount Vernon City Hall is currently closed to the public now due to the coronavirus threat.

Bids should be mailed to the following address:

City of Mount Vernon
910 Cleveland Avenue
Mount Vernon, WA 98273

PLEASE - Note on the envelope which project you are bidding on.

Contractors wishing to deliver a bid in person while public access to City Hall is limited should call the City Finance Department at (360) 336-6207 before dropping off a bid in person.

Bid openings will be held within One Hour following the specified time indicated in the bid documents, at the Police Court Campus – Council Chambers until public access to City Hall changes. The Police Court Campus is also closed to the public at this time.

The bid openings will be live-streamed on the City's YouTube site at:

https://www.youtube.com/channel/UCUob_hcQUmd4S93YkletdrA/featured and made available on the city website.

A teleconference call will also be set up as follows:

Access Phone Number:	888-924-9240
International Access Phone:	+1 647-723-6907
7-Digit Access Code:	3366207

Contractors or the public may request copies of opened bids by calling the City Finance Department or emailing mvfinance@mountvernonwa.gov.

Subcontractor List

Prepared in compliance with RCW 39.30.060 as amended

To Be Submitted with the Bid Proposal

Project Name _____

Failure to list subcontractors with whom the bidder, if awarded the contract, will directly subcontract for performance of the work of heating, ventilation and air conditioning, plumbing, as described in Chapter 18.106 RCW, and electrical, as described in Chapter 19.28 RCW or naming more than one subcontractor to perform the same work will result in your bid being non-responsive and therefore void.

Subcontractor(s) with whom the bidder will directly subcontract that are proposed to perform the work of heating, ventilation and air conditioning, plumbing, as described in Chapter 18.106 RCW, and electrical as described in Chapter 19.28 RCW **must** be listed below. The work to be performed is to be listed below the subcontractor(s) name.

To the extent the Project includes one or more categories of work referenced in RCW 39.30.060, and no subcontractor is listed below to perform such work, the bidder certifies that the work will either (i) be performed by the bidder itself, or (ii) be performed by a lower tier subcontractor who will not contract directly with the bidder.

Subcontractor Name _____
Work to be performed _____

Subcontractor Name _____
Work to be performed _____


Subcontractor Name _____
Work to be performed _____

Subcontractor Name _____
Work to be performed _____

Subcontractor Name _____
Work to be performed _____

* Bidder's are notified that is the opinion of the enforcement agency that PVC or metal conduit, junction boxes, etc, are considered electrical equipment and therefore considered part of electrical work, even if the installation is for future use and no wiring or electrical current is connected during the project.

ADJUSTING UTILITY IRON TO GRADE

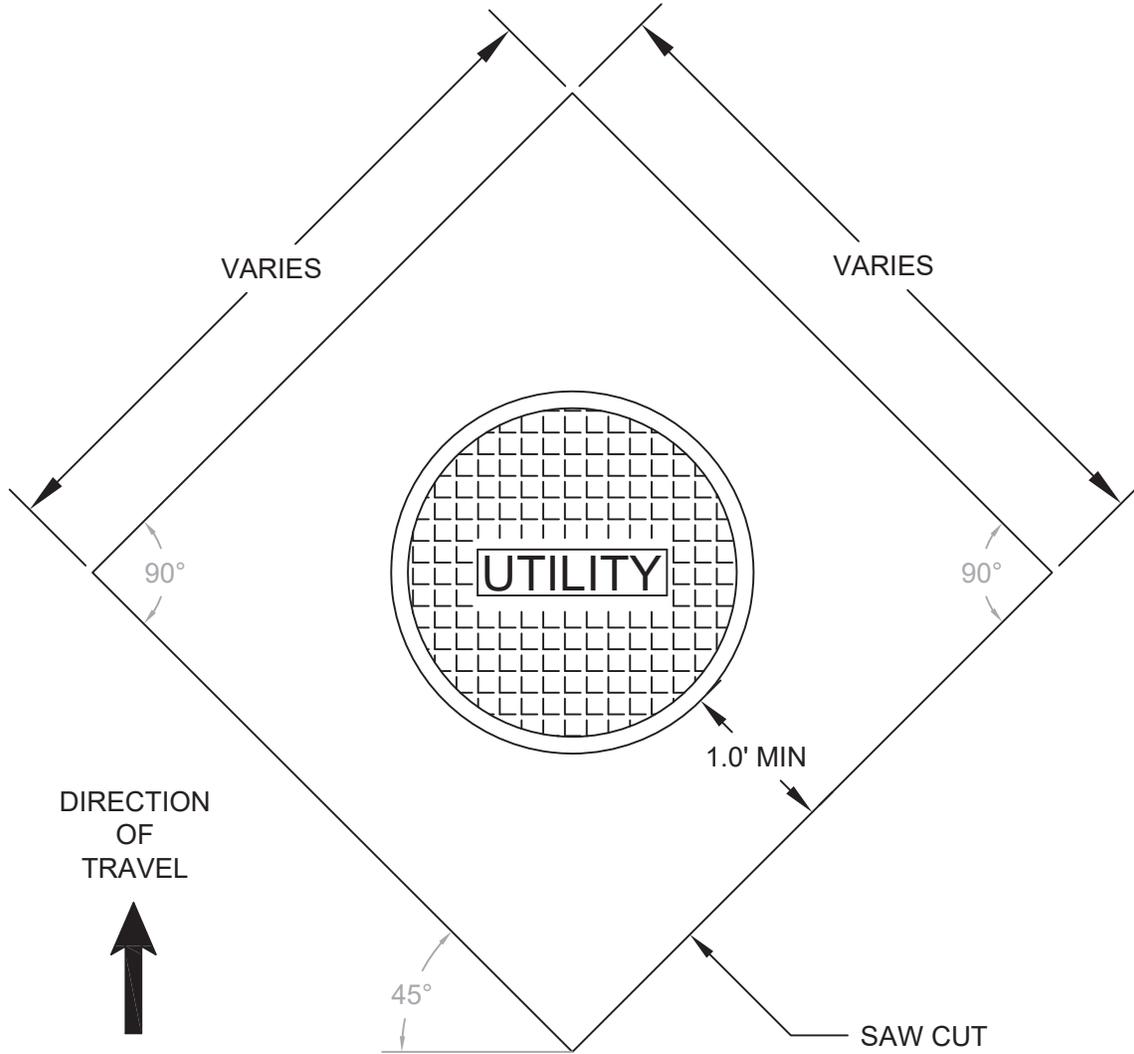

NOTES:

1. SAW CUT AND REMOVE ASPHALT FULL DEPTH TO LIMITS SHOWN.
2. ADJUST FRAME TO MATCH FINISHED GRADE USING APPROVED CONCRETE ADJUSTMENT RINGS AND APPROVED NON-SHRINK GROUT.
3. TACK ALL EDGES.
4. PLACE, GRADE AND COMPACT ASPHALT. 2.0" LIFTS, 92% COMPACTION.
5. ROLLER FINISH.
6. SEAL JOINT WITH APPROVED MATERIAL.

STANDARD DETAIL	3-4
SCALE	NONE
REVISION DATE	04/16